

1/20

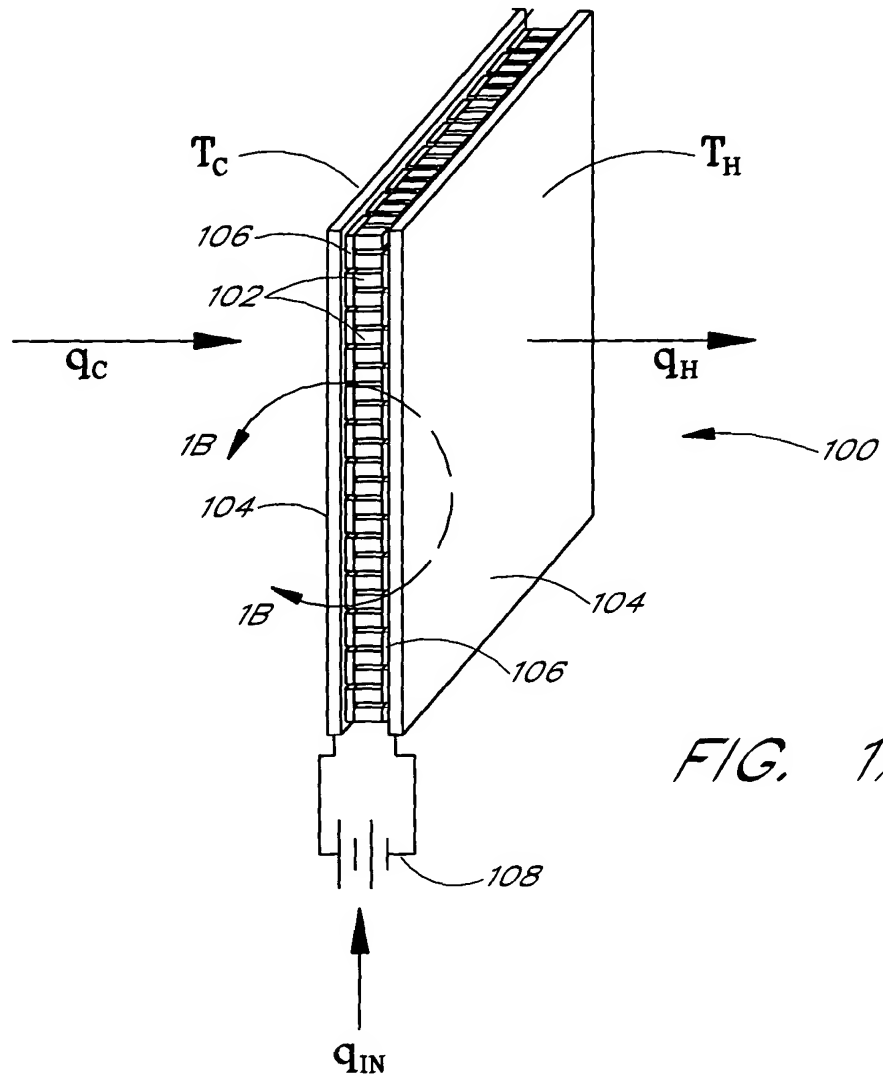


FIG. 1A

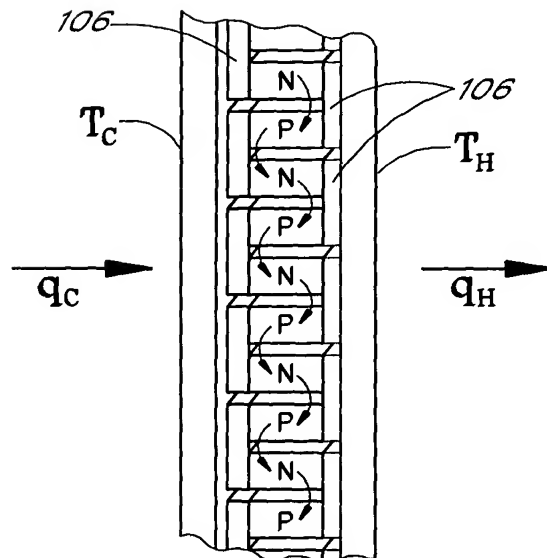


FIG. 1B

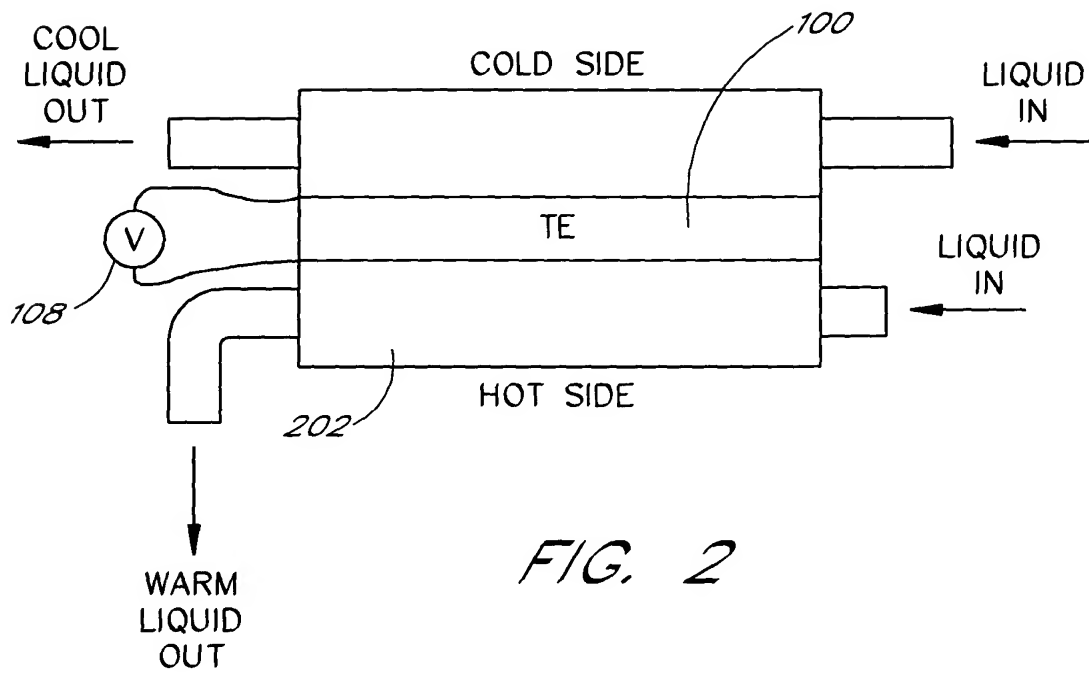


FIG. 2

EFFICIENCY THERMOELECTRICS UTILIZING THERMAL ISOLATION

Lon E. Bell

Appl. No.: Unknown Atty. Docket: BSST.002C1

3/20

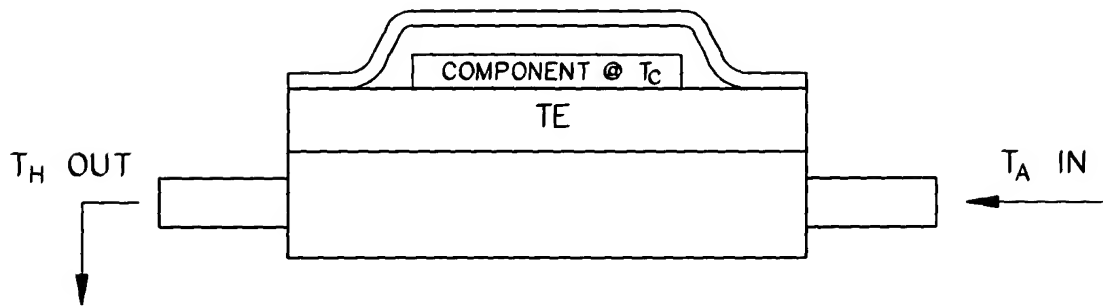


FIG. 3

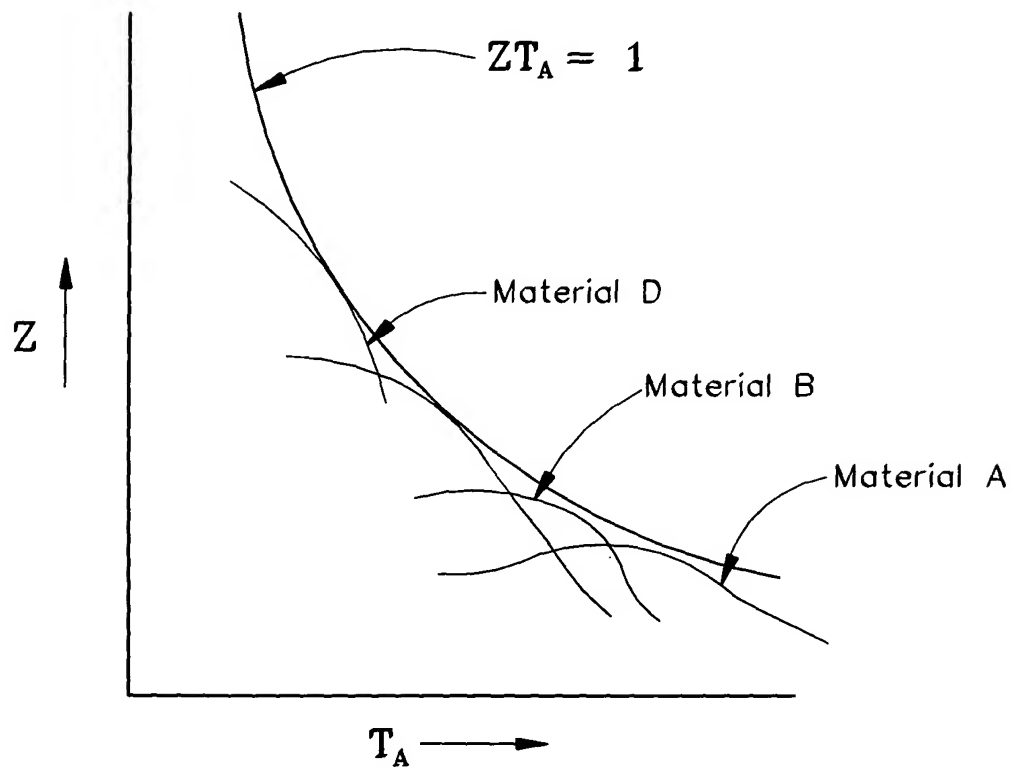


FIG. 4

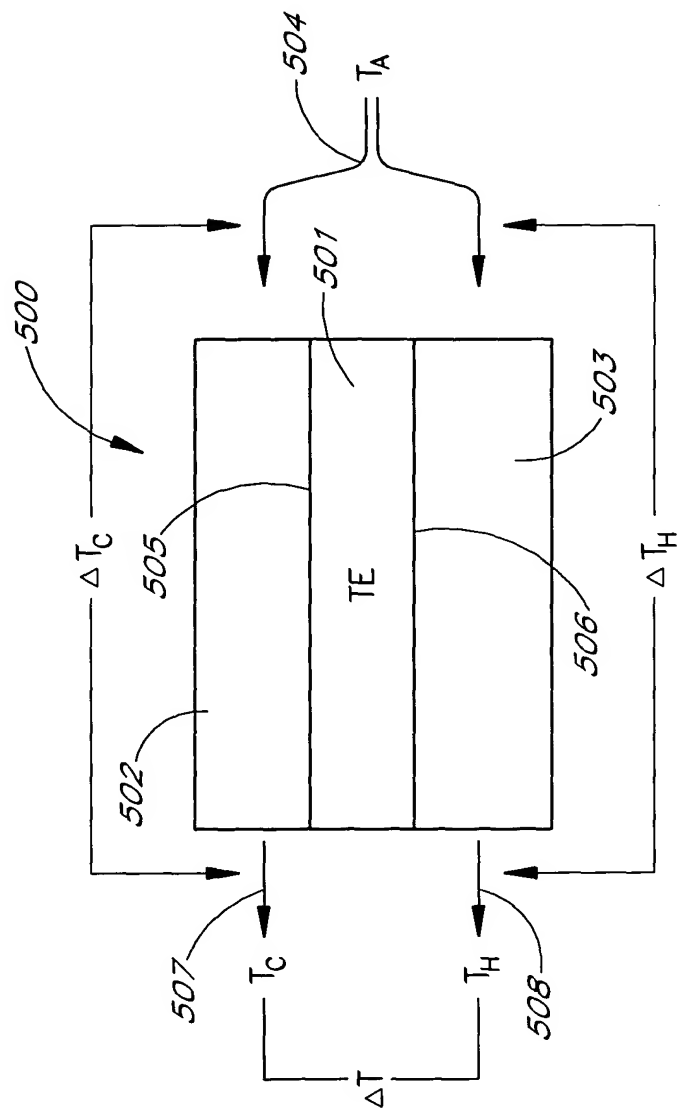


FIG. 5

6/20

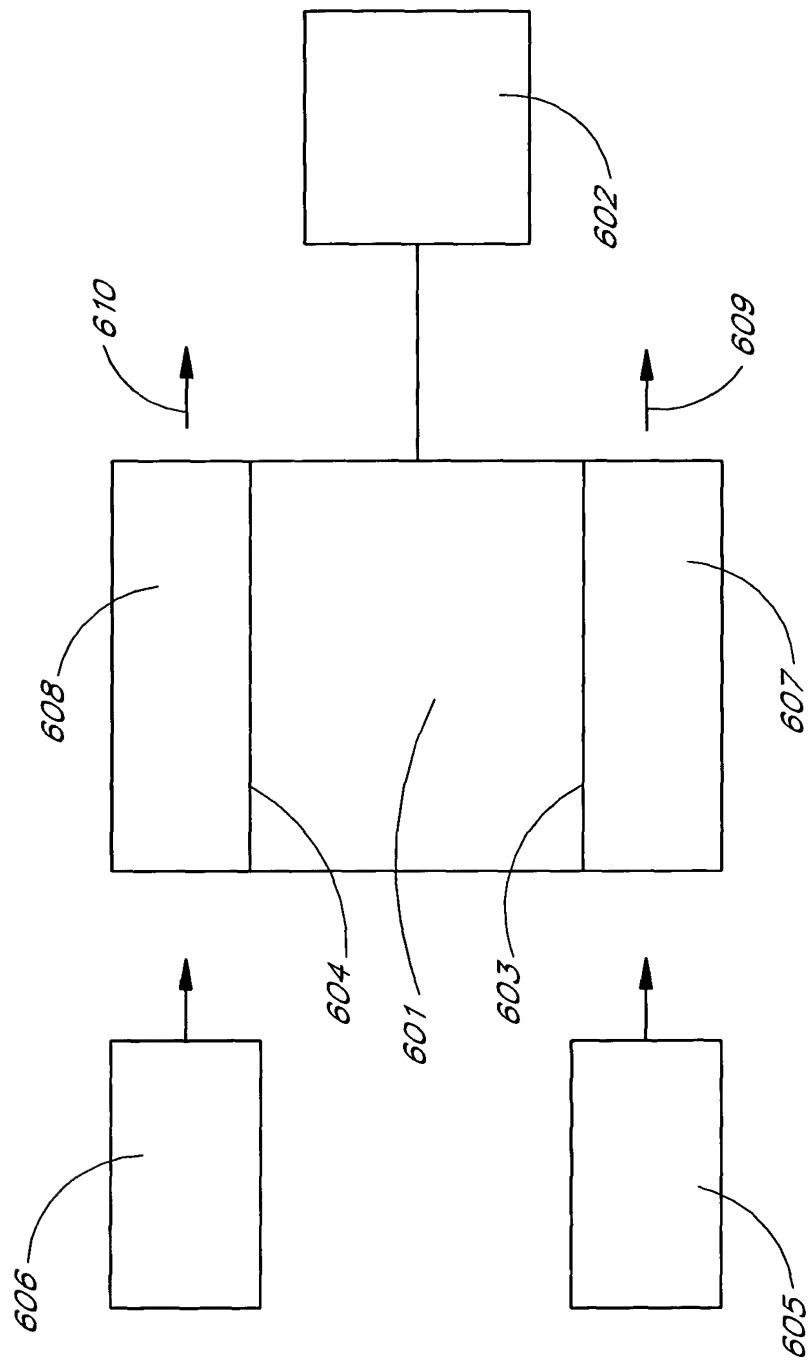


FIG. 6

7/20

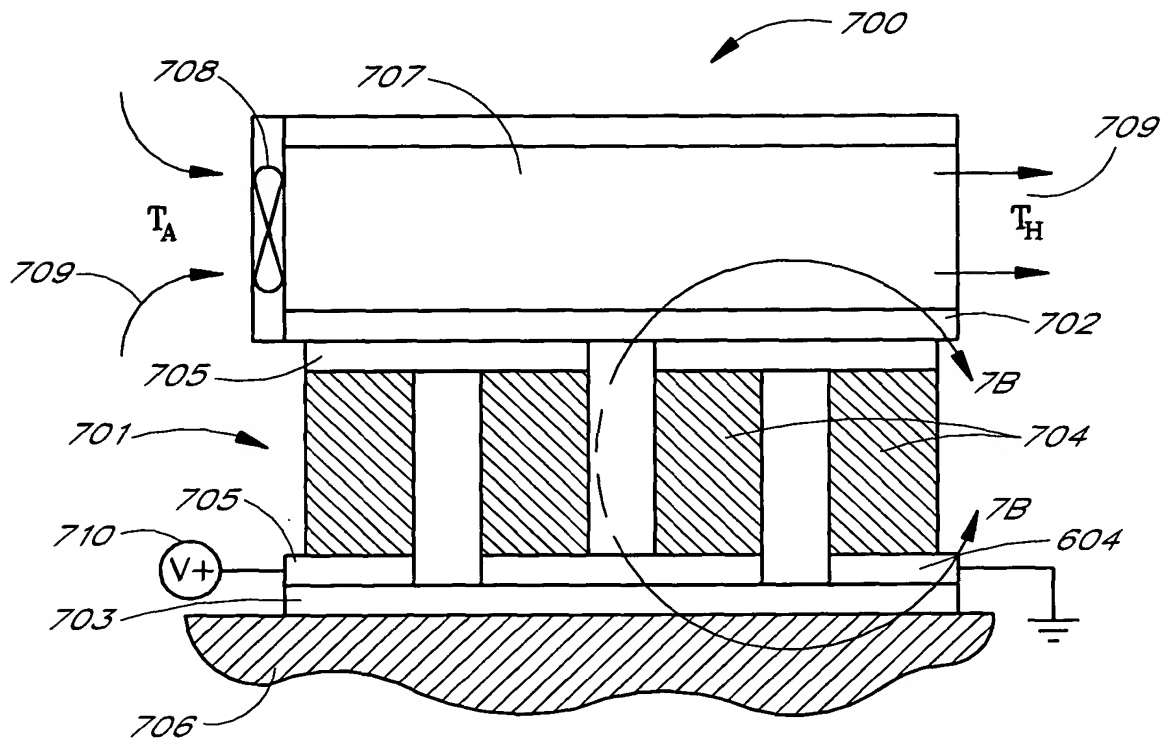


FIG. 7A

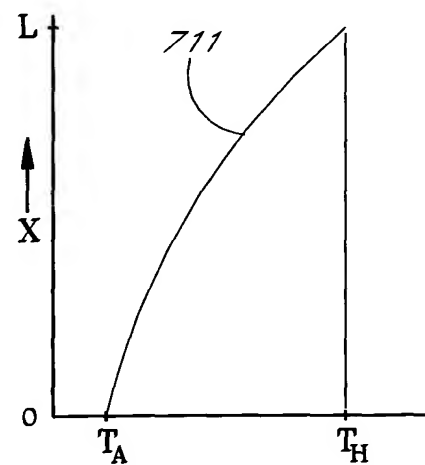
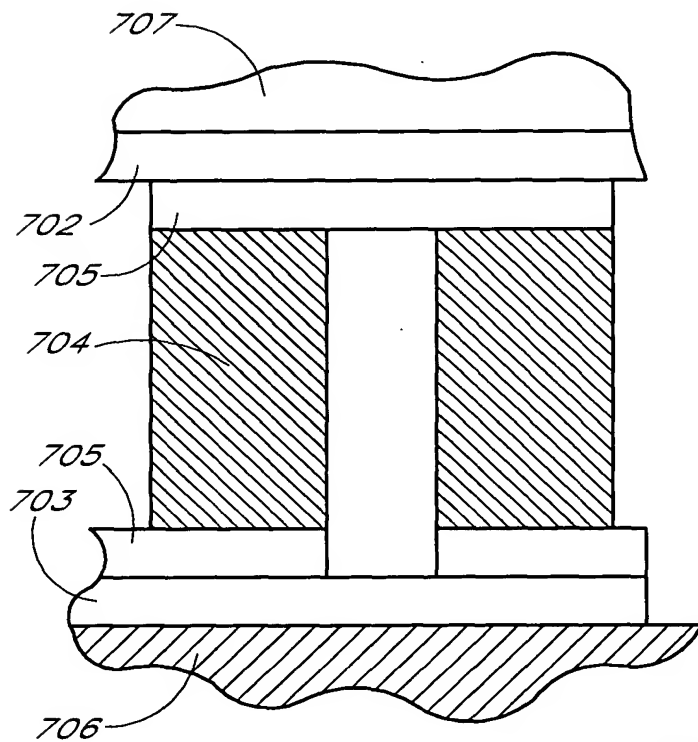


FIG. 7B

8/20

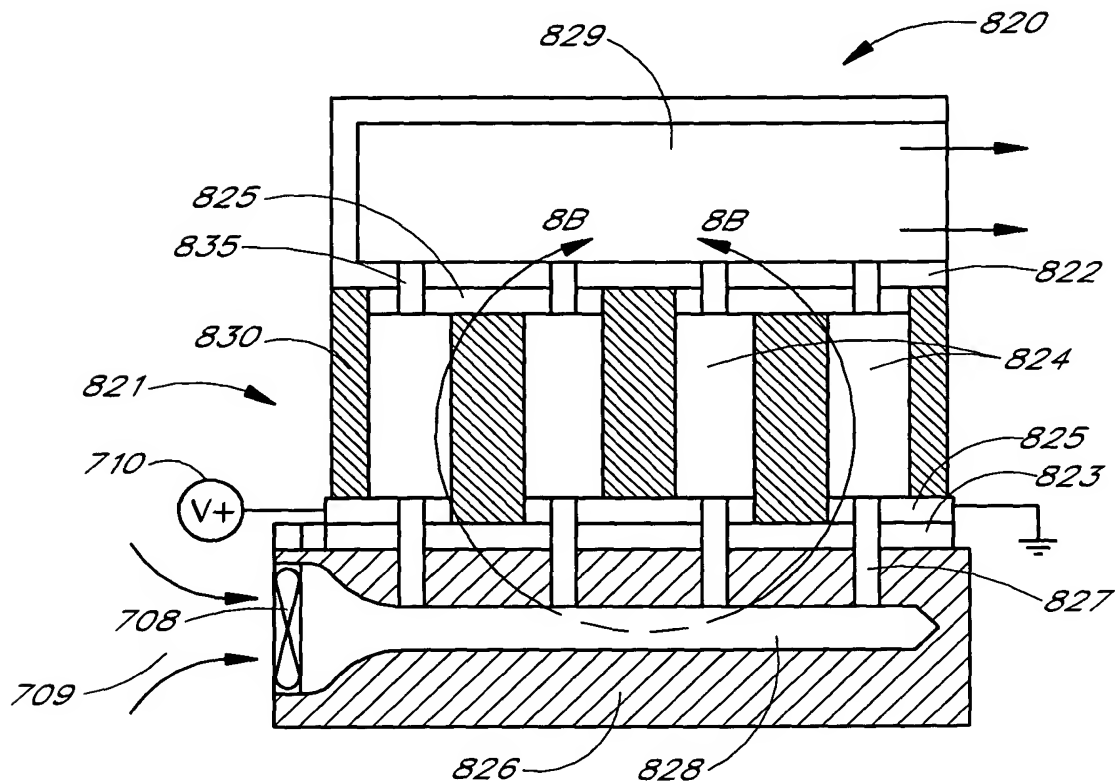


FIG. 8A

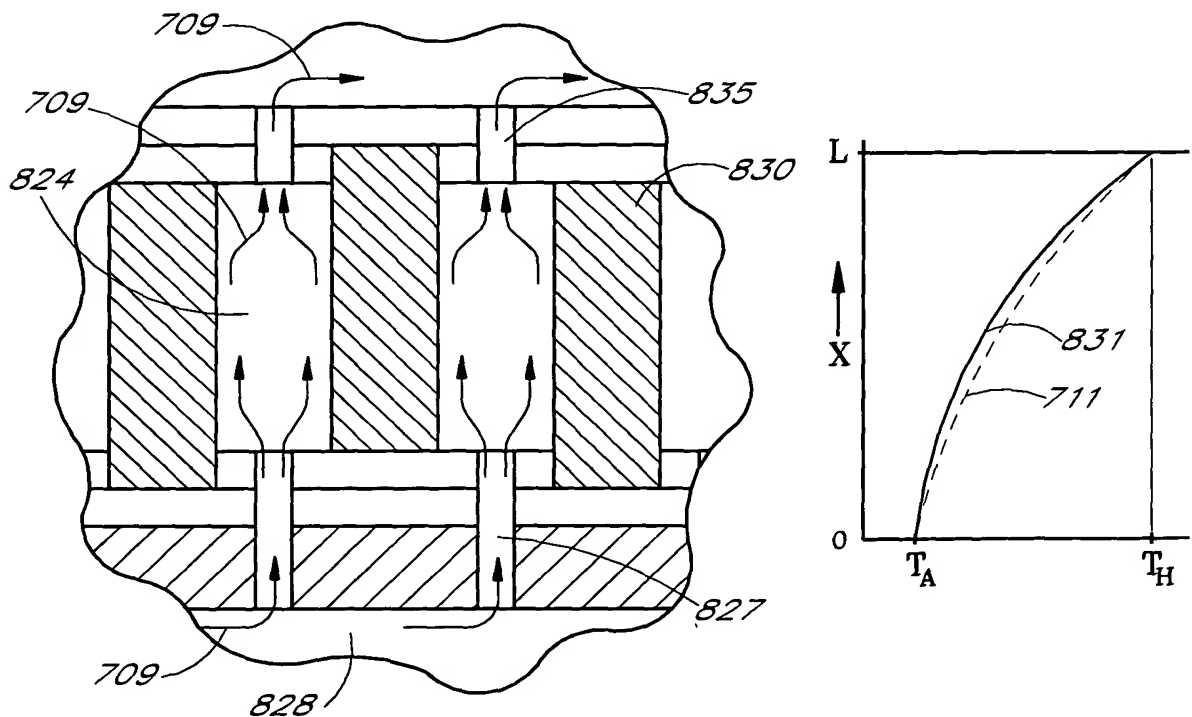


FIG. 8B



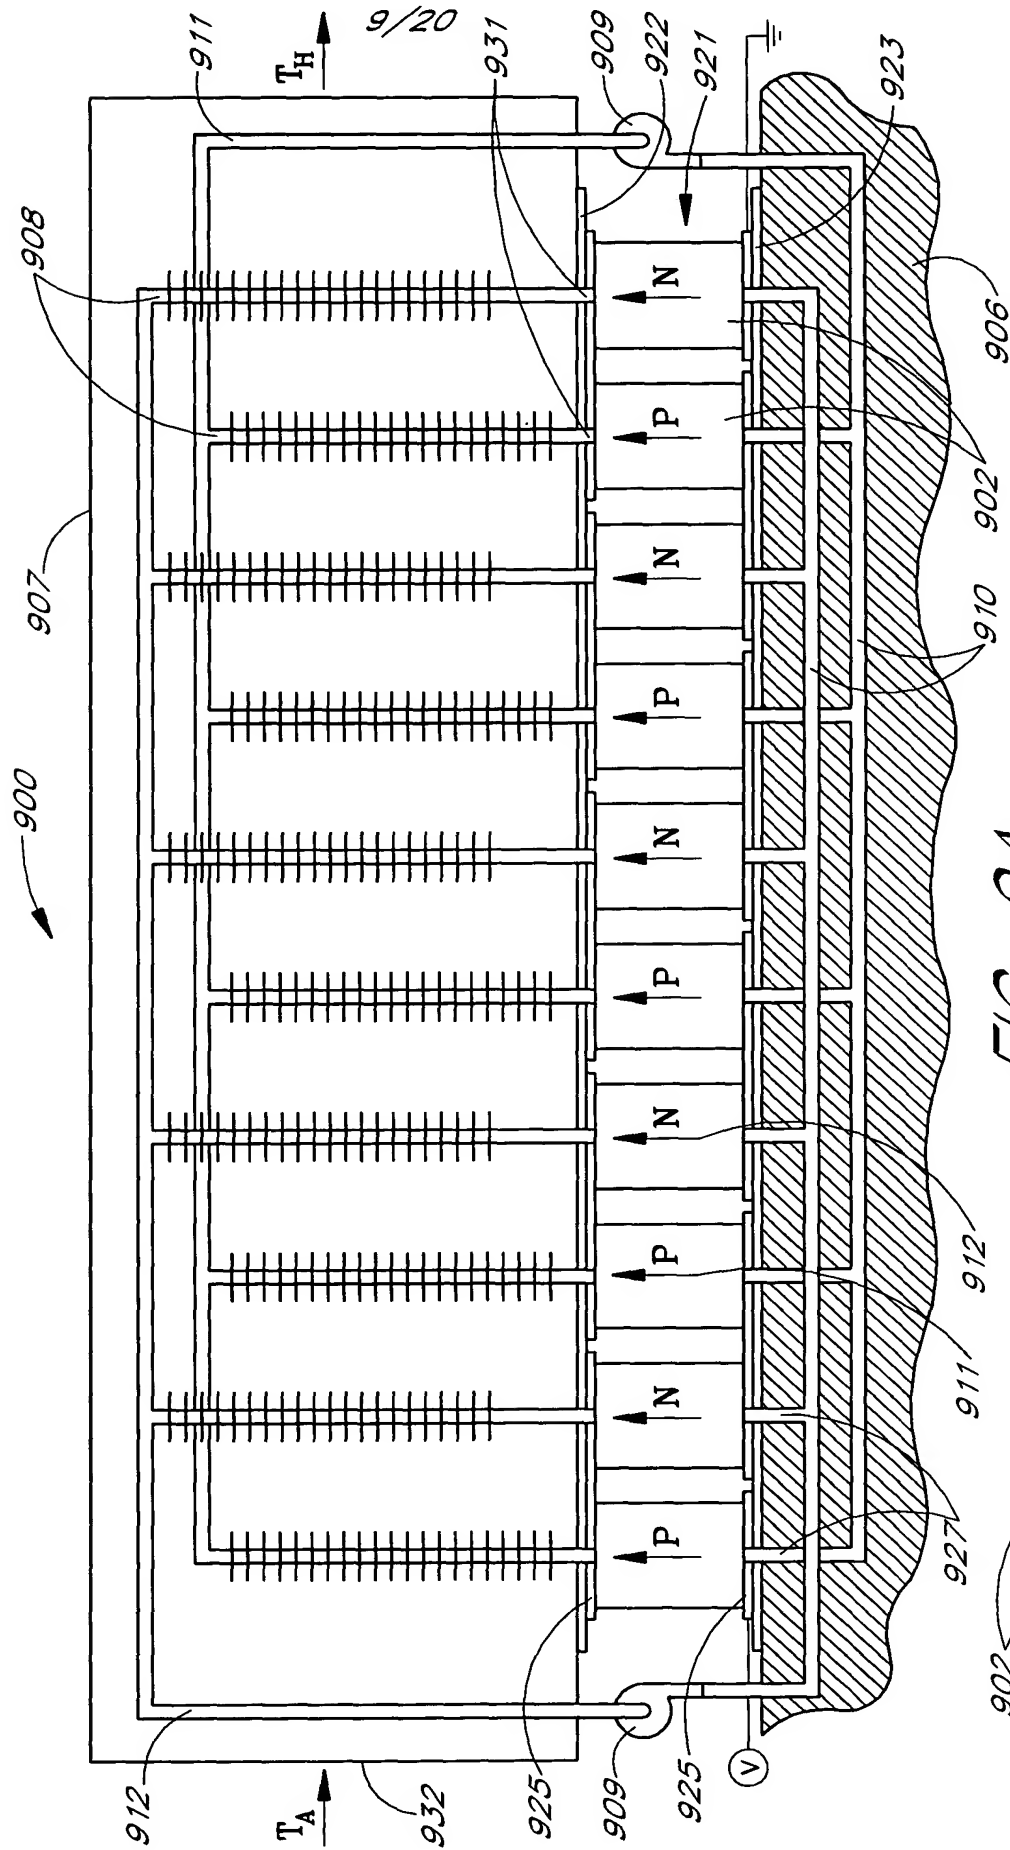


FIG. 9A

FIG. 9B

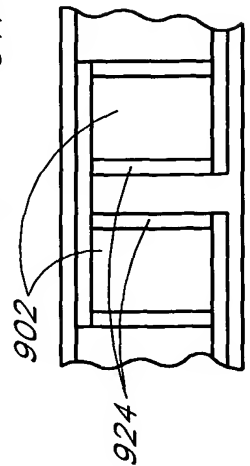


FIG. 10


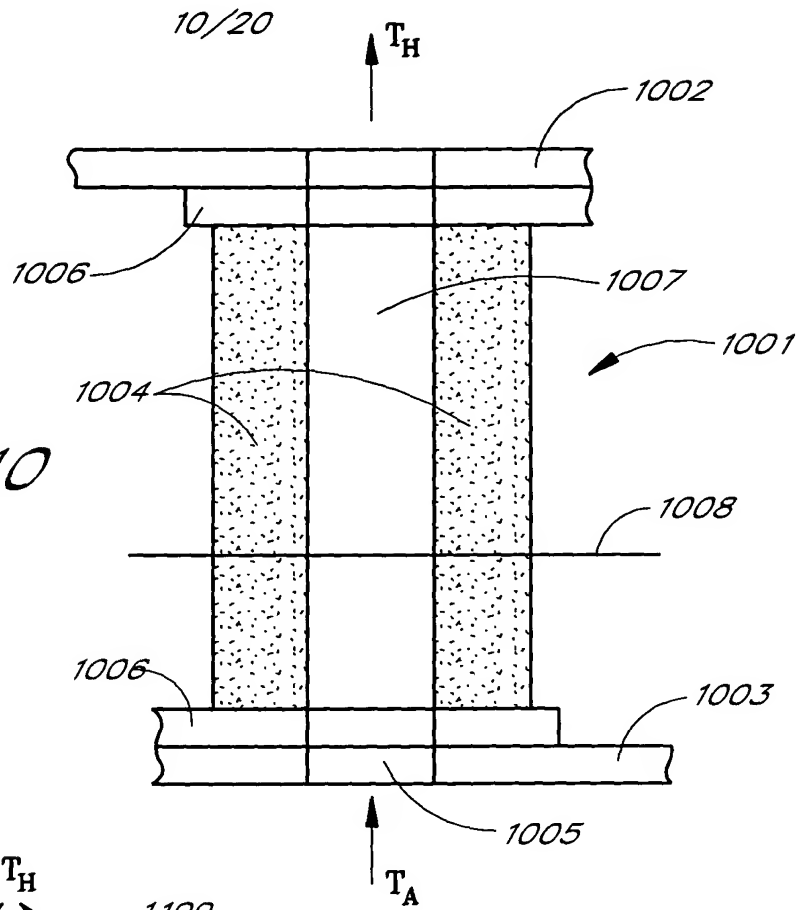


FIG. 11



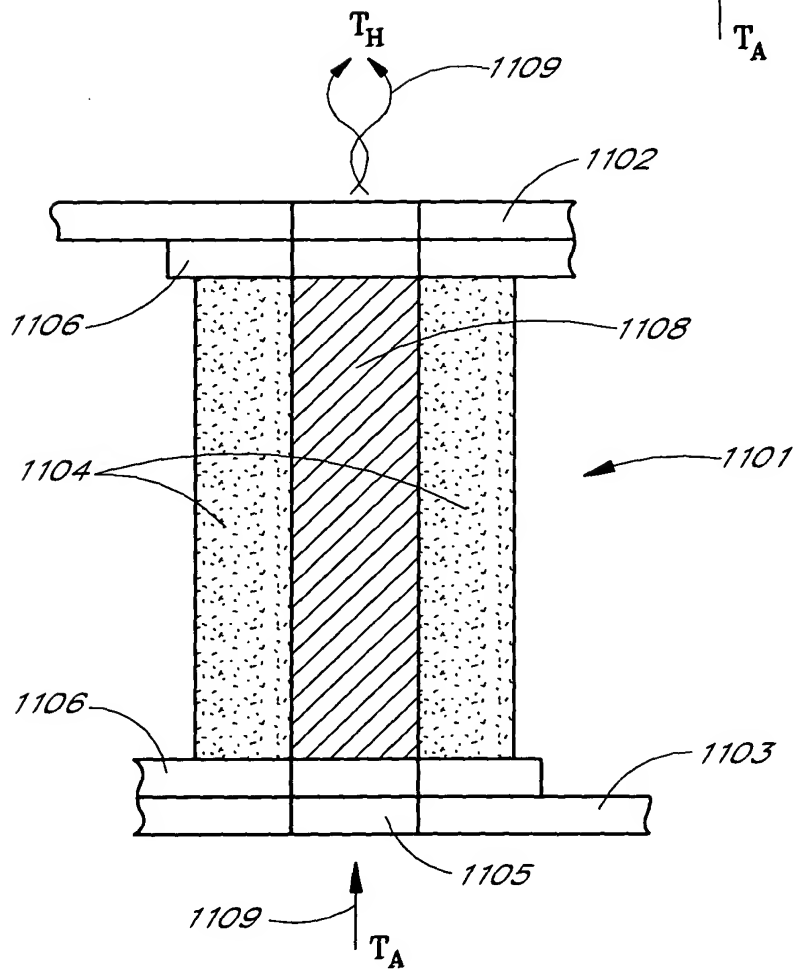

12/20

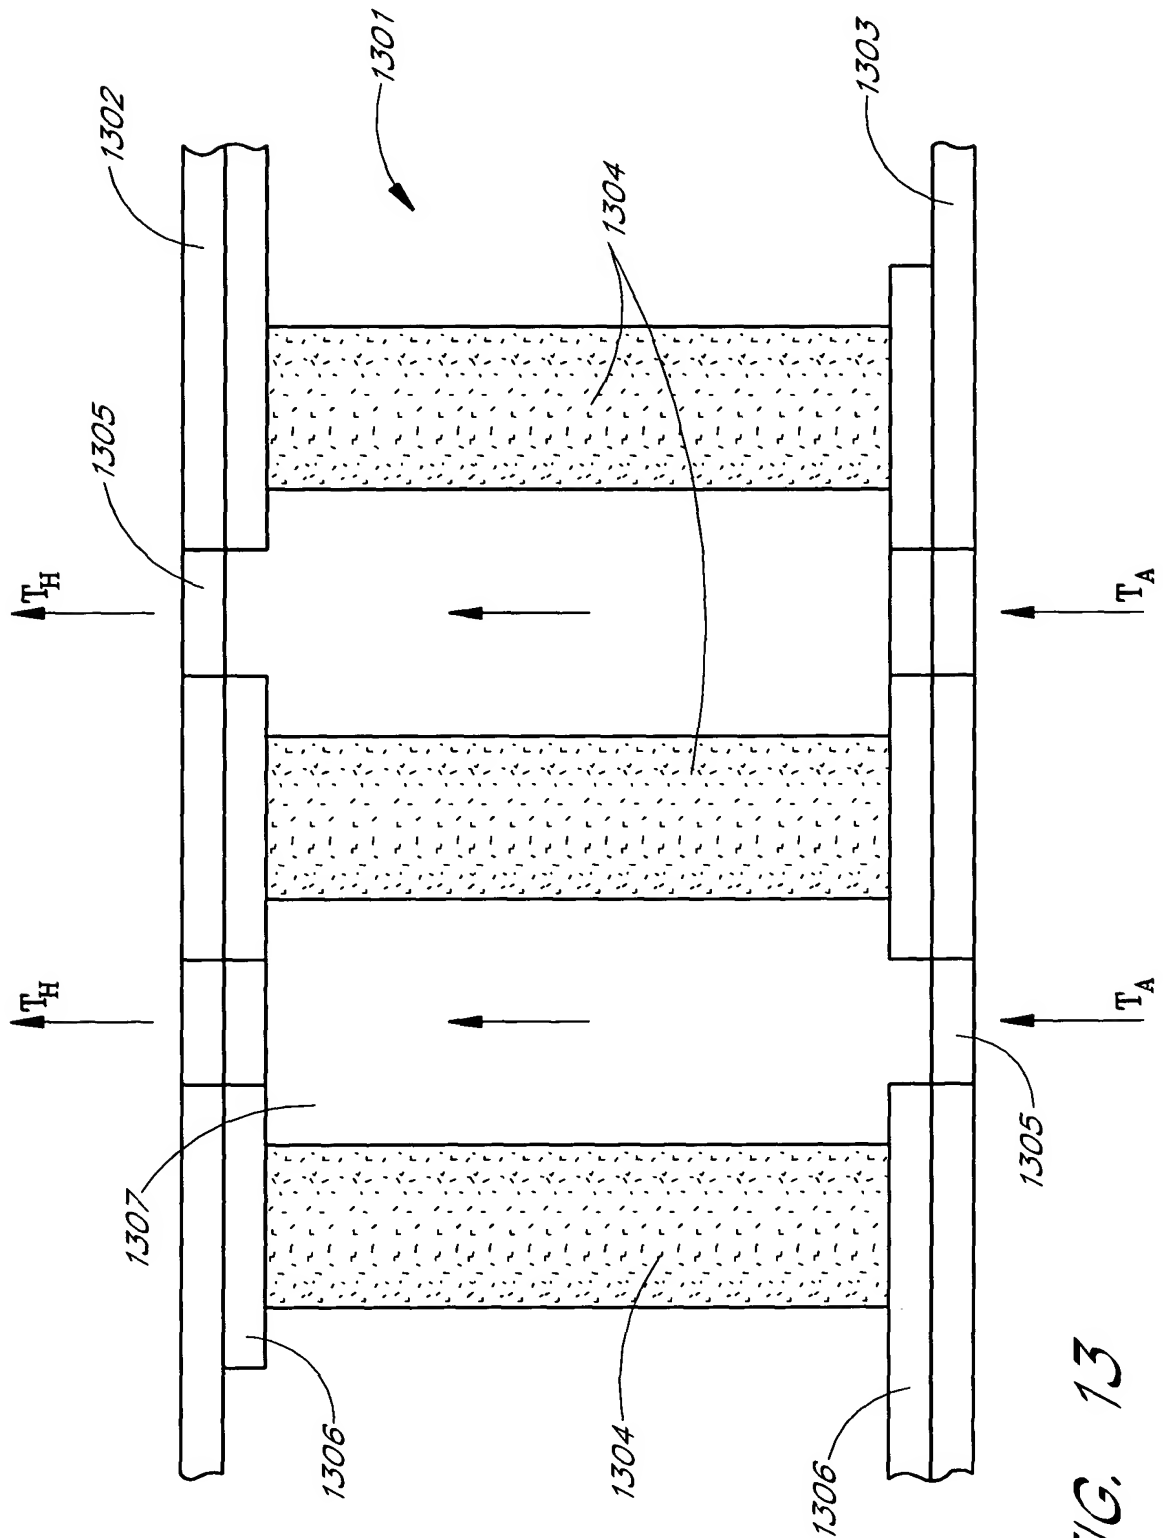


FIG. 13

13/20

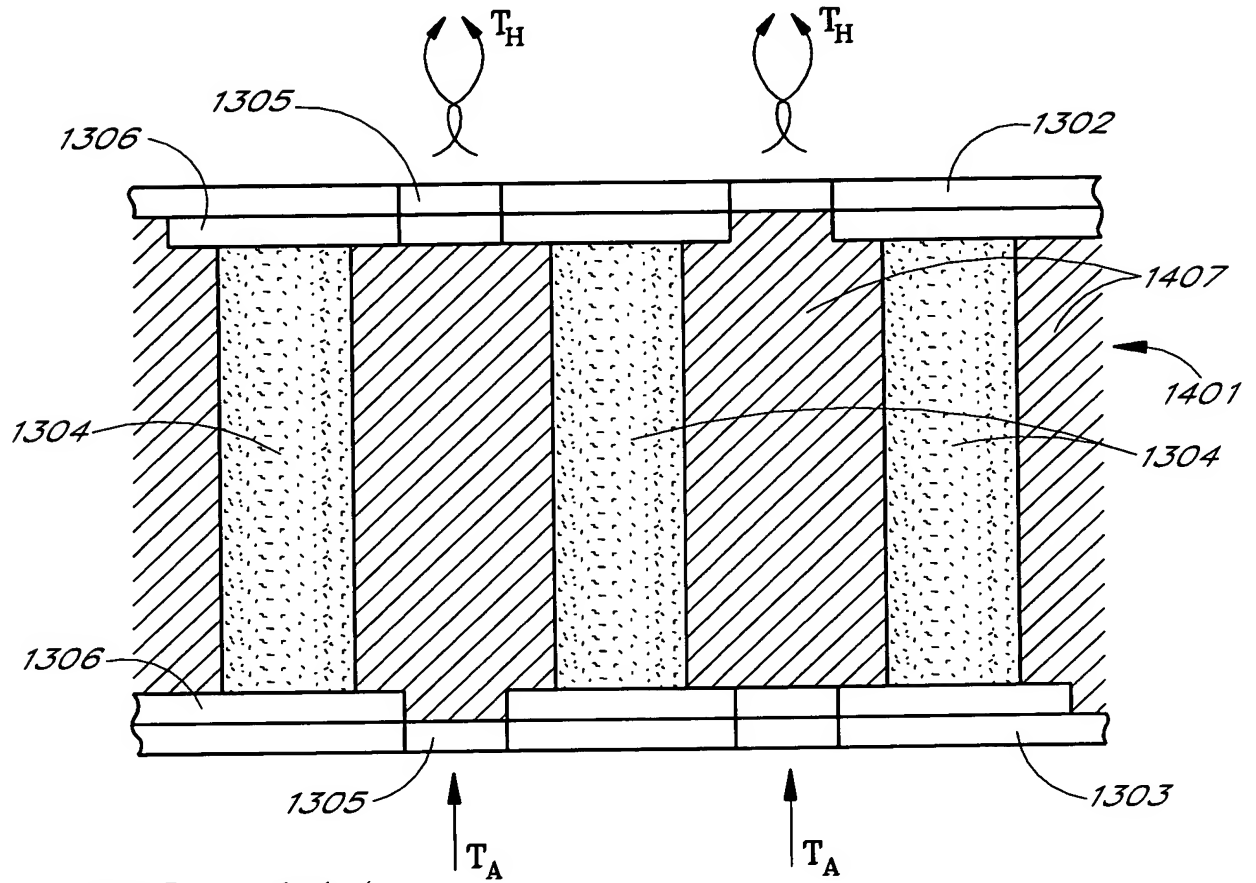


FIG. 14A



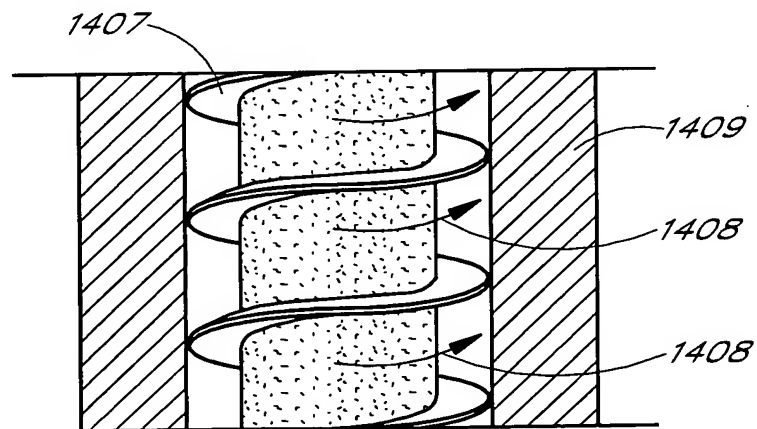


FIG. 14B

14/20

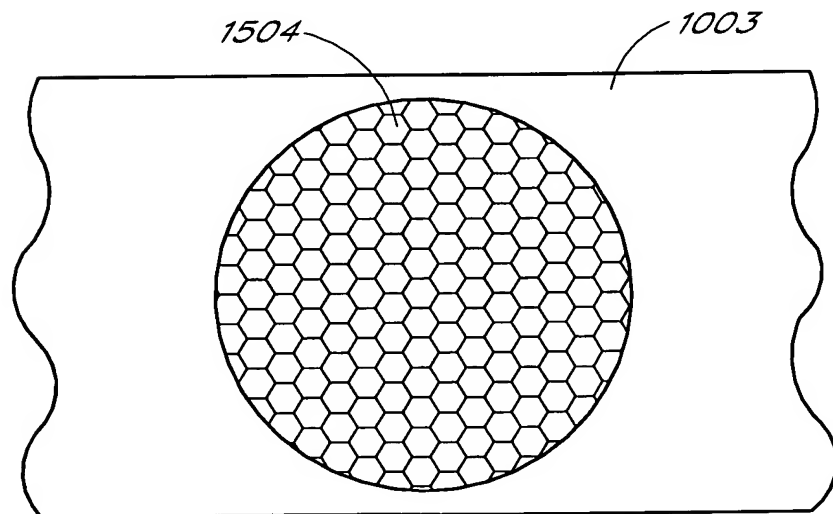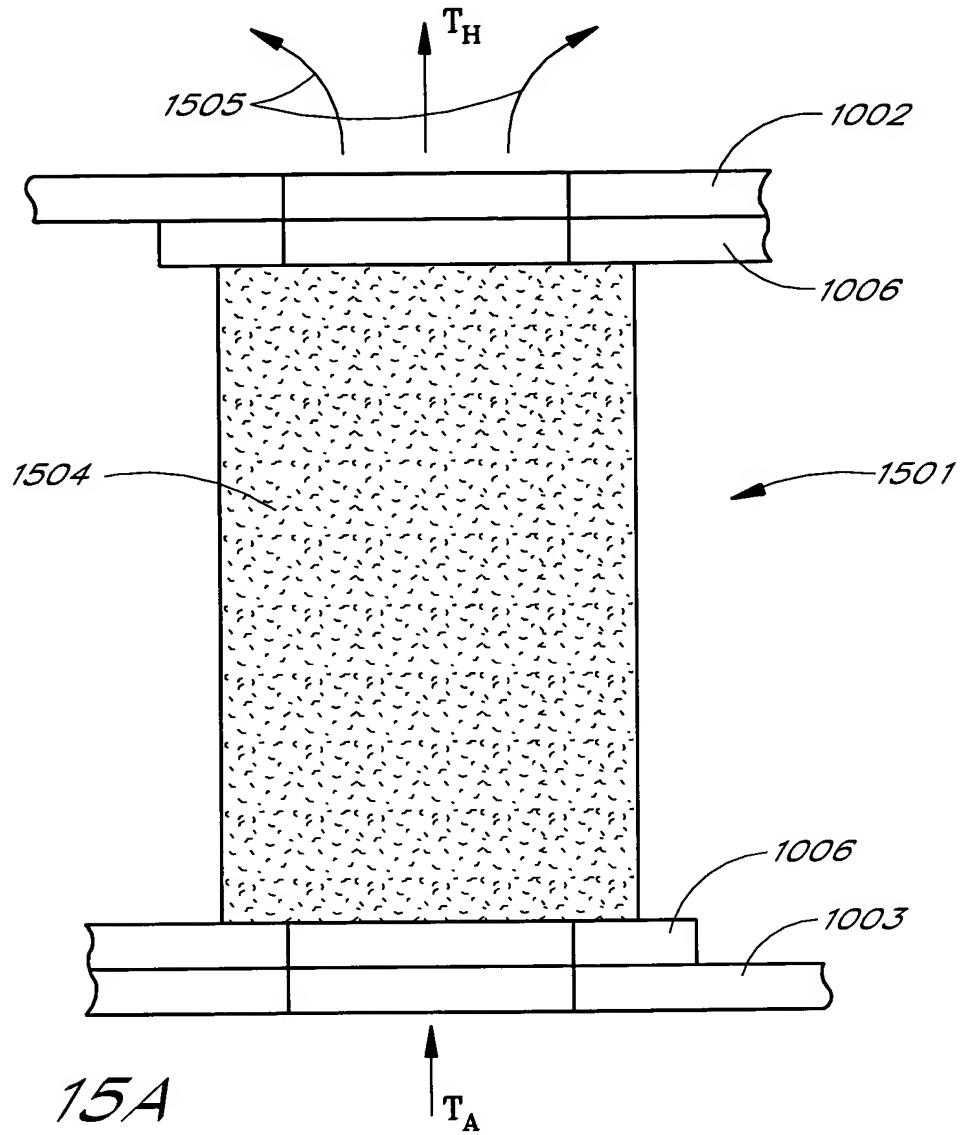

15/20

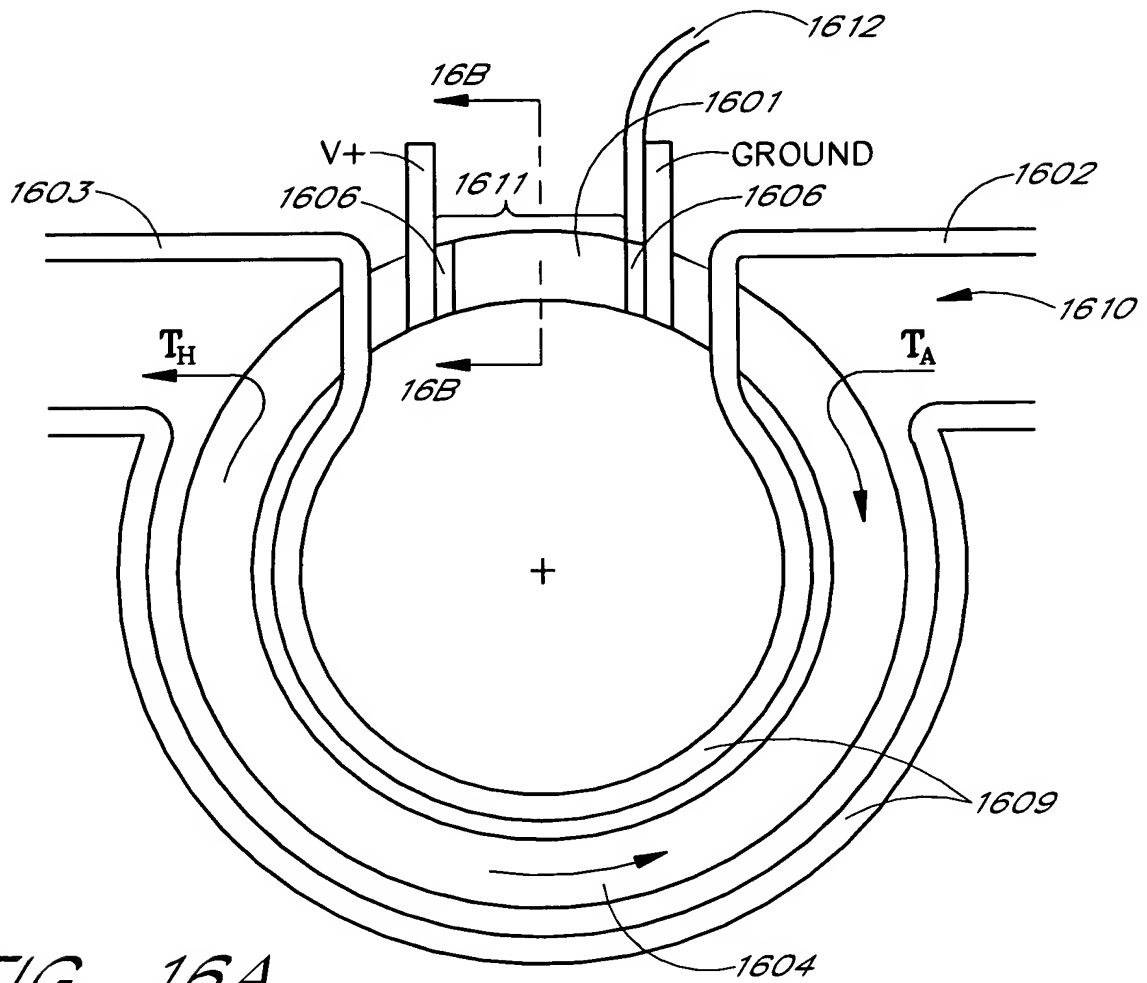


FIG. 16A

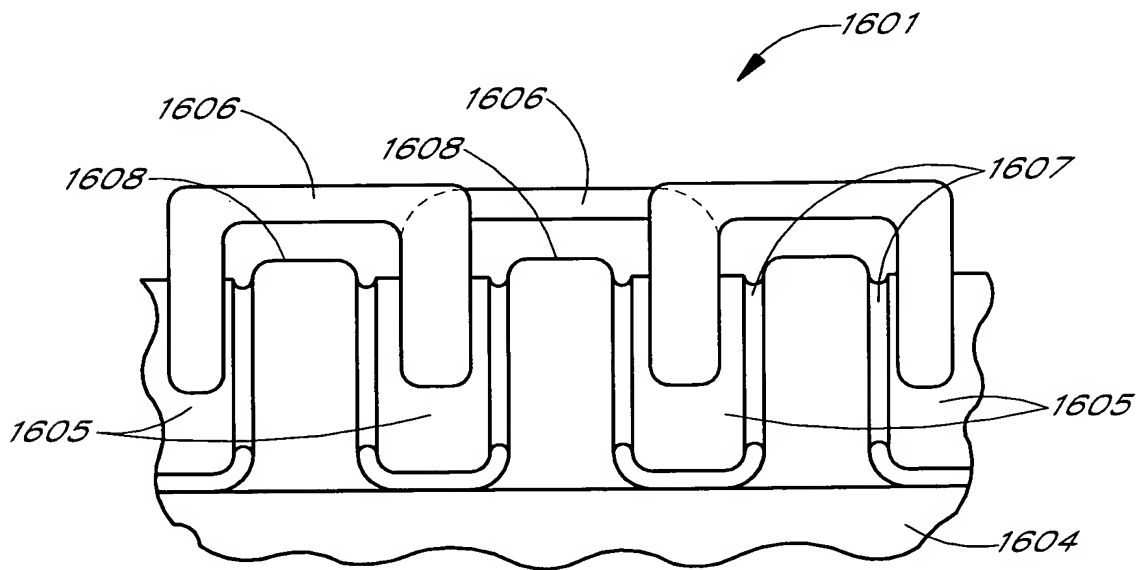
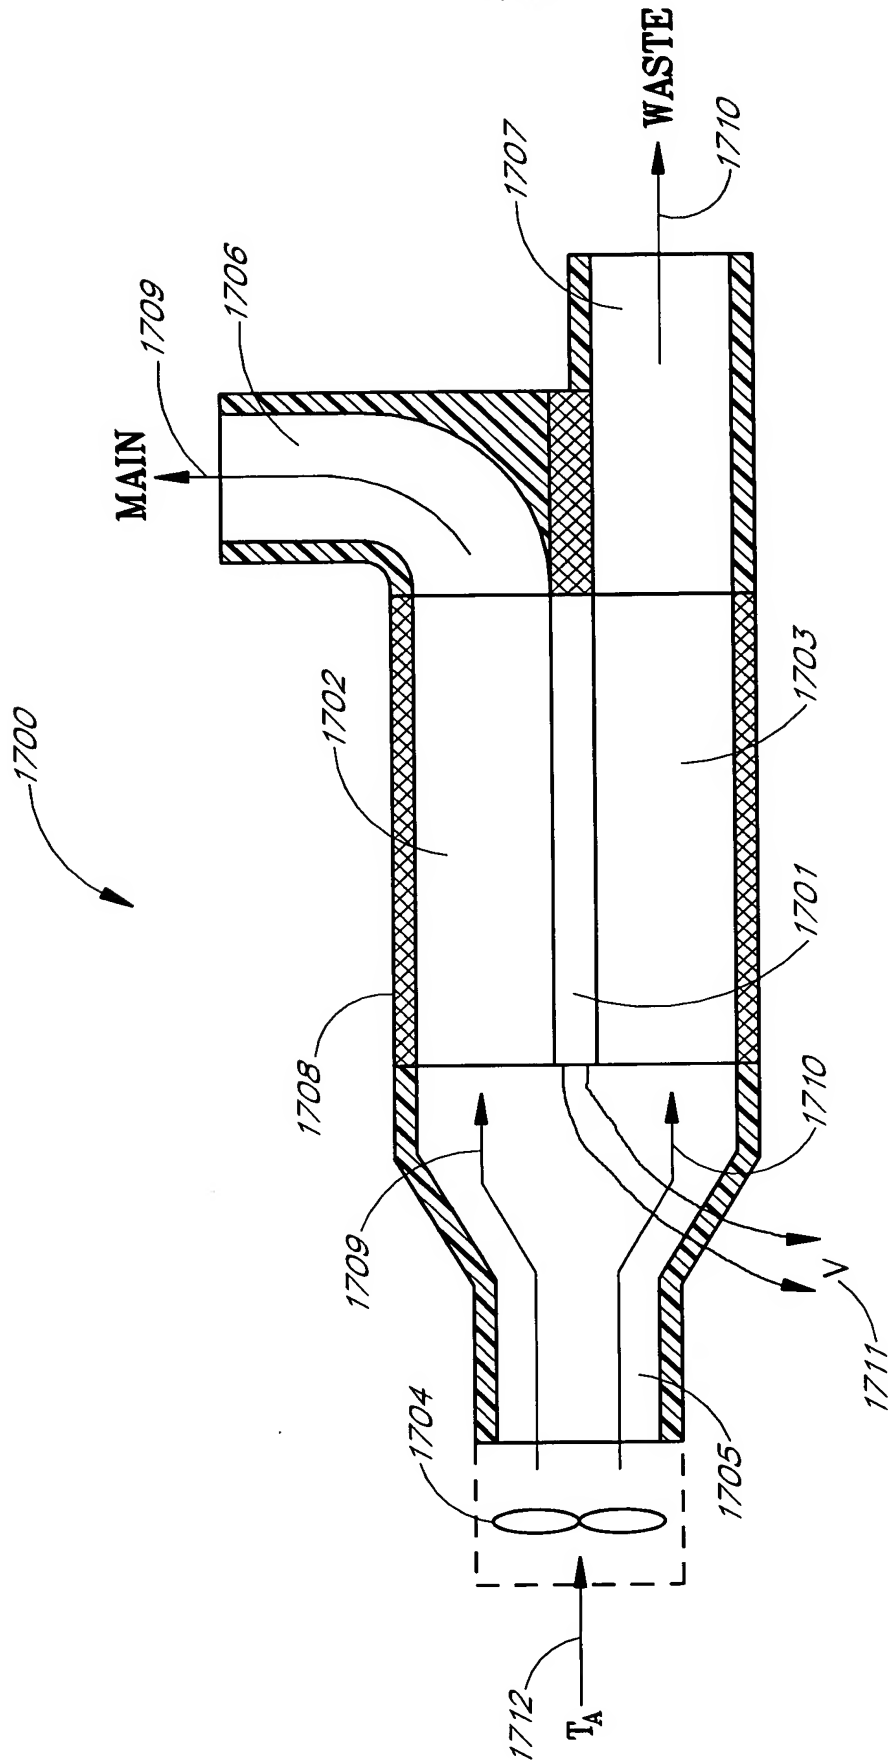
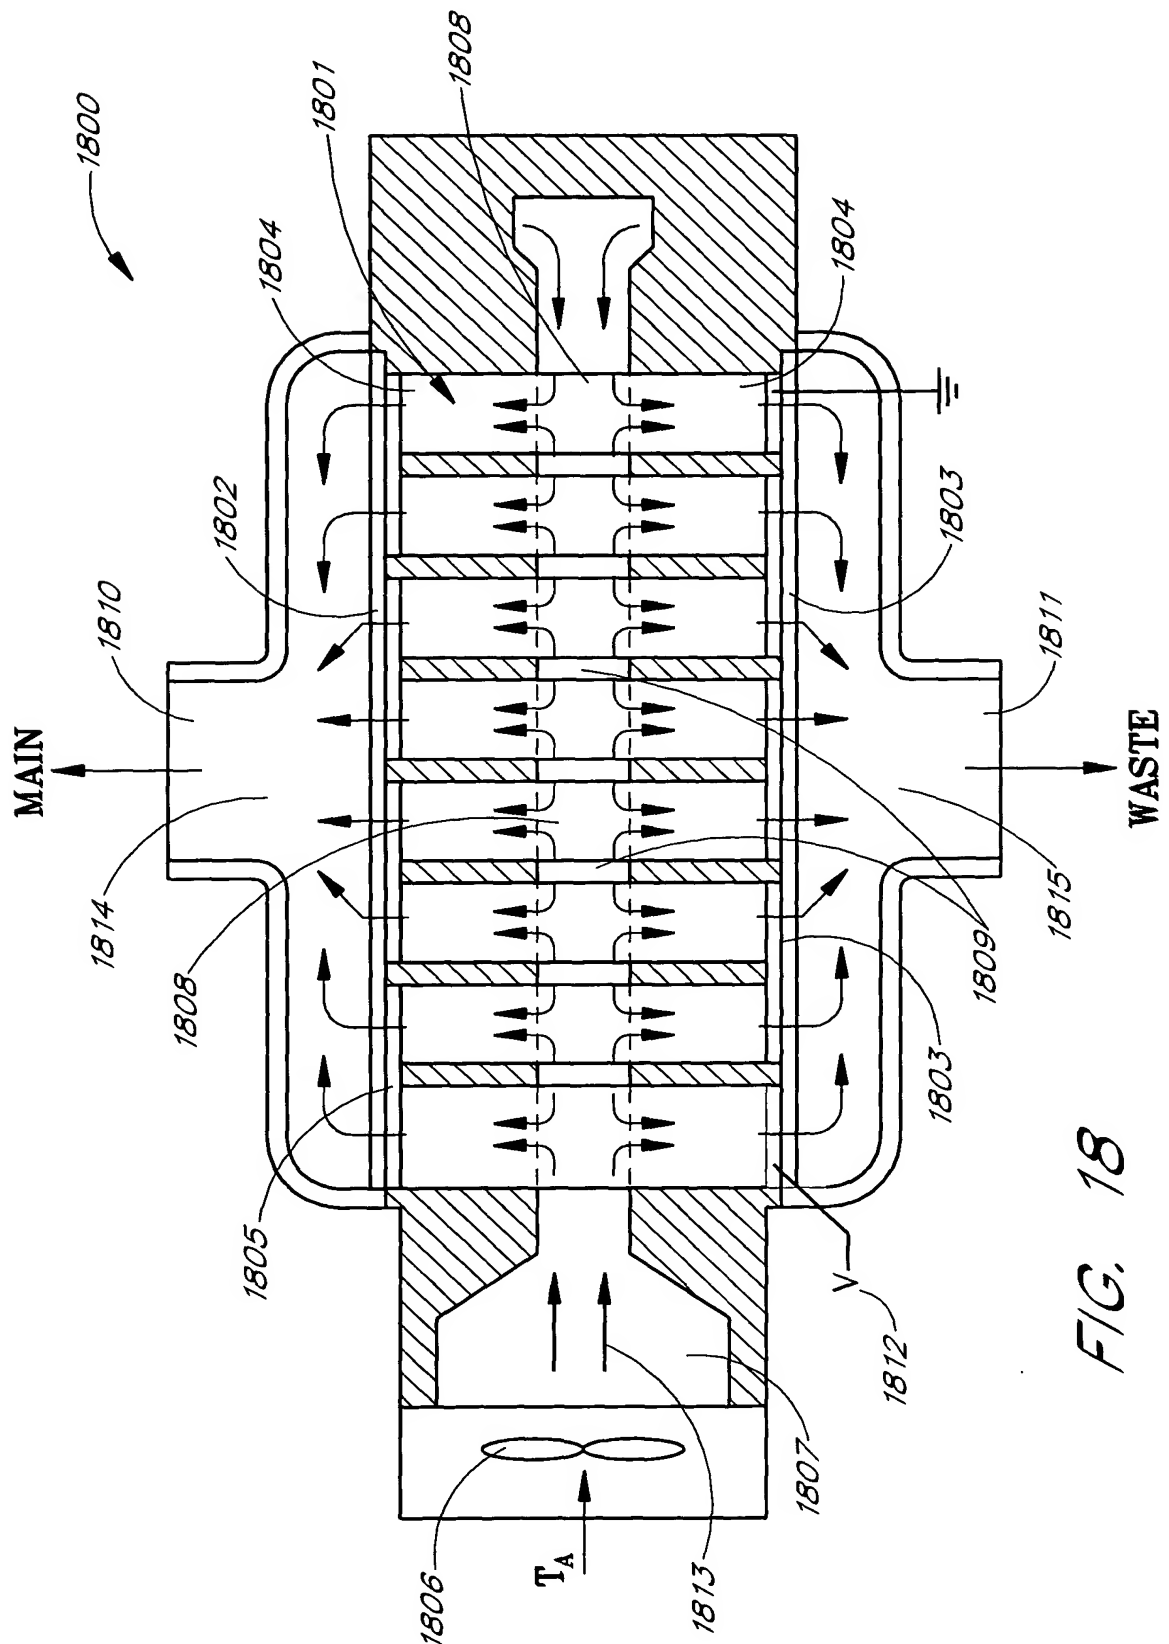


FIG. 16B

16/20







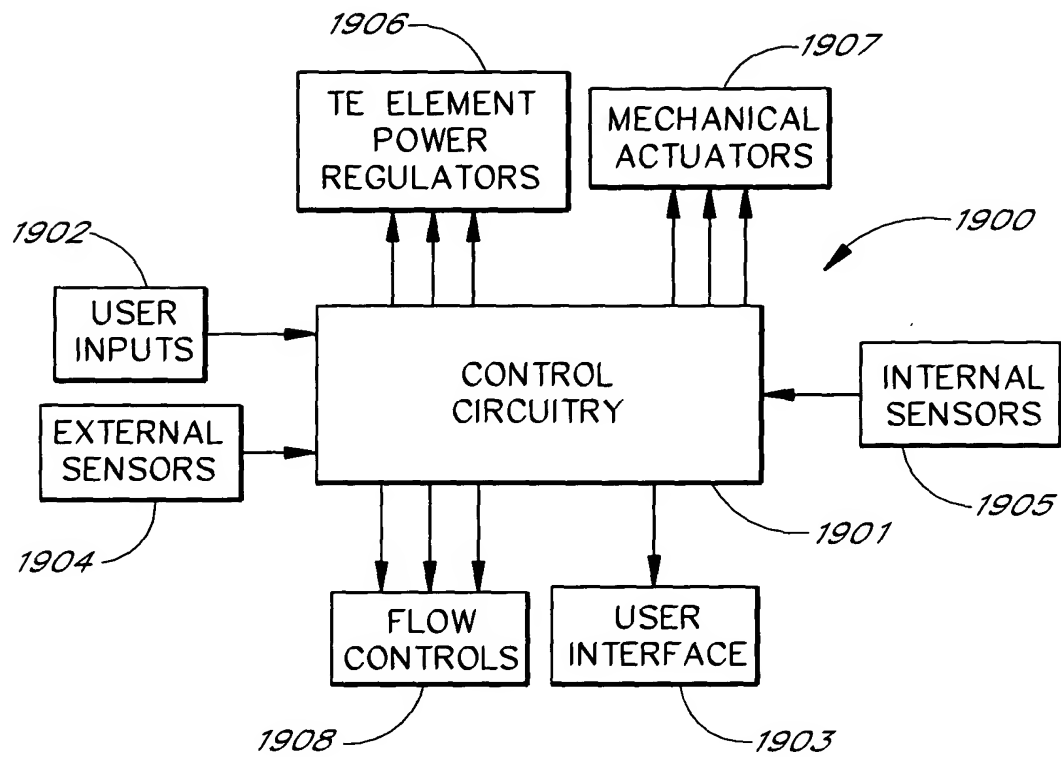
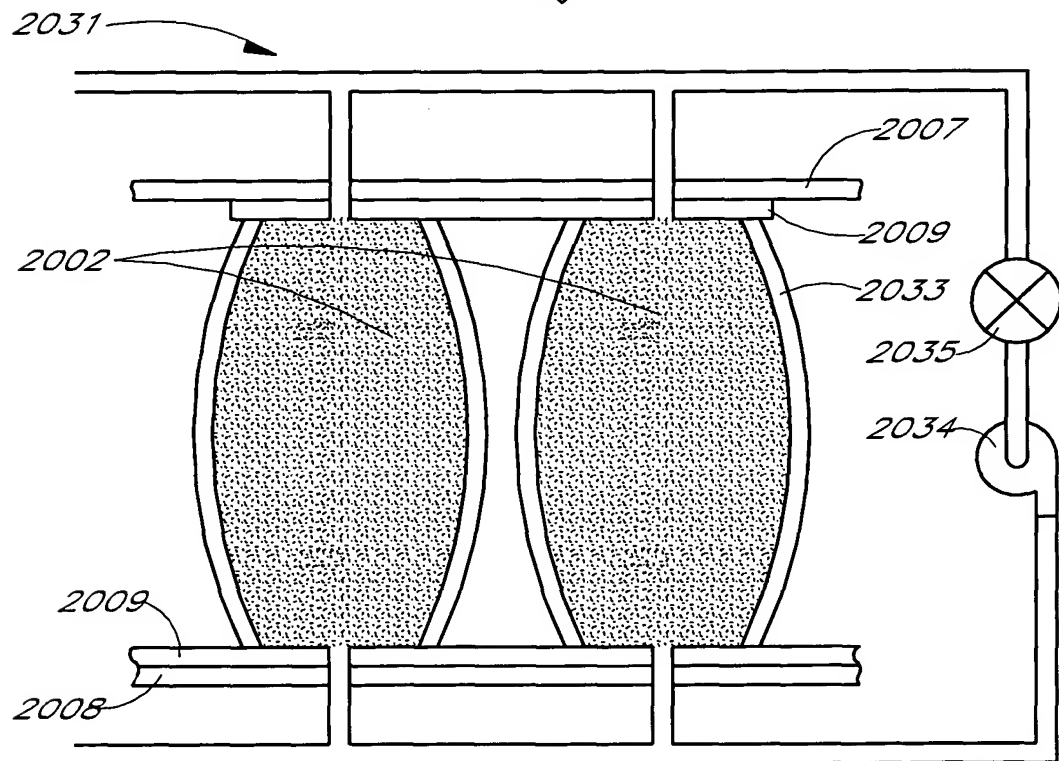



FIG. 19

A cross-sectional view of a multi-layered structure. The structure consists of a top layer (2001) and a bottom layer (2008). Between these layers are two main vertical sections (2002 and 2003) filled with a stippled pattern. These sections are separated by a central vertical gap (2004). The entire assembly is bounded by a top horizontal layer (2007) and a bottom horizontal layer (2009). A bracket on the left side (2005) indicates the height of the central section. A bracket on the right side (2006') indicates the height of the bottom section. A small triangular feature (2010) is located at the bottom center of the structure.

FIG. 20A



*FIG. 20B*

20/20

